BULLARD
BOLLARDS
Think Bollard Think Bullard

BUNNY MINITRACK C600



BULLARD BOLLARDS
Think Bollard Think Bullard

CODE:
BB-001081.BUST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED IP68 STANDARD 110-277V DALI

GENERAL INFORMATION:

The Bunny MiniTrack 600 Series of linear fixtures to be recessed in the ceiling with very low recess depth characterized by high level of visual comfort. Available in various lengths. Designed for lighting of exterior and interior application thanks to the wide availability of optics and powers. The body and diffuser closure caps are constructed of high oxidation resistant aluminum alloy which is subjected to nano-bonderite treatment and finished with texturized polyester powder paint, making the product resistant to atmospheric agents and UV rays, guaranteeing maximum protection over the years. The external finishing frame and screws are in stainless steel. Silicone gaskets ensure maximum sealing in all operating and temperature conditions. The ultra transparent tempered sodium calcium glass diffuser ensures maximum light transmittance and is finished with a silkscreen border. The product, thanks to the steel bracket system, can be easily installed in any kind of false ceiling or suspended ceiling.

LIGHTING:

LED

VOLTAGE:

110-277V

GASKETS:

Silicone gaskets

FIXTURE TYPE:

Ceiling Luminaires

MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation, Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 68

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved

Updated 03/09/2026

BULLARD BOLLARDS
Think Bollard Think Bullard

CODE:
BB-001081.BUST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED | IP68 | STANDARD | 110-277V | III | DALI

APPLINCE CLASS:

III

OPERATION RANGE:

110-277V - 50/60 Hz

DRIVER POSITION:

Integral

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Nylon cable gland M20 Ø 7/13 mm / H07RN8-F 3x1mm2

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

12° - Symmetrical narrow beam (<=15°)
25° - Symmetrical medium flood (15 ° - 45 °)
50° - Symmetrical wide beam (45 ° - 125 °)
14° x 47° - 2 Axis symmetrical
78° x 47° - Asymmetric flood (wall washer)

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort
Wide range of finishes
Functional design / Minimal design
Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Stainless steel

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved


Updated 03/09/2026

BULLARD BOLLARDS
Think Bollard Think Bullard

CODE: BB-001081.BUST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

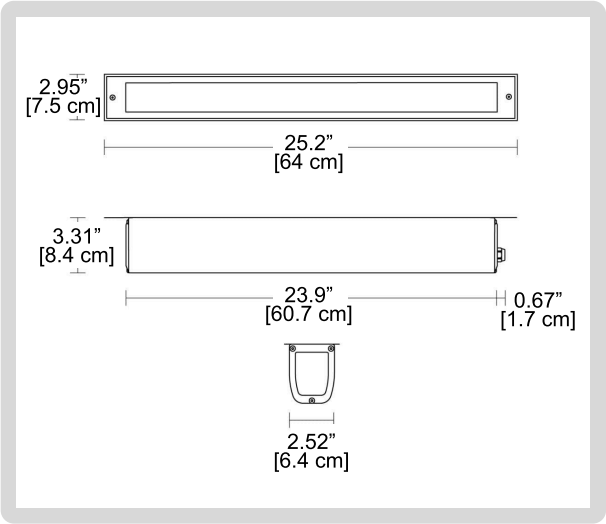

LED | IP68 | STANDARD | 110-277V | DALI

HOW TO ORDER:

CODE:

Example:
CODE: BB-001081.BUST-GH-B1-L1-DIM-AC604

BB-001081.BUST-GH-B1-L1-DIM-AC604

1 DIMENSIONS:

A) Recessed depth -	P:	3.31" (8.4 cm)
B) Length -	L:	25.20" (64 cm)
C) Width -	W:	2.95" (7.5 cm)

2 BEAM ANGLE:

-B1	12°
-B2	25°
-B3	50°
-B4	14° x 47°
-B5	78° x 47°

3 LIGHT SOURCE:

-L1	LED | 1 x 18W | 3000K | 1 x 1752 lm | 110-277V
-L2	LED | 1 x 18W | 4000K | 1 x 1944 lm | 110-277V

4 DIMMING OPTIONS:

-NON	NON-Dimmable
-DIM	0-10V
-DAL	Dali

5 ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC279

IP 68 connector for through wiring 4P



-AC604

Rough-in housing 600mm



-AC573

Ceiling brackets



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 03/09/2026