BULLARD
BOLLARDS
Think Bollard Think Bullard

BUNNY TRACK 600
(INGROUND LUMINAIRES)



BULLARD BOLLARDS
Think Bollard Think Bullard

CODE:
BB-001296.NGST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:





GENERAL INFORMATION:

The Bunny Track 600 is a compact linear inground LED luminaire designed to deliver precise and efficient architectural lighting in outdoor environments. Featuring a stainless steel AISI 316L trim and a durable extruded aluminum EN AW-6060 T5 housing, it provides excellent resistance to corrosion and harsh conditions, reinforced by an IP67 rating and an 8 mm tempered glass diffuser. With multiple beam angle options—including narrow, medium, symmetric, and asymmetric wall-washer distributions—it offers flexible solutions for façade lighting, landscape accents, and wall grazing applications. Equipped with high-performance LED configurations in 3000K or 4000K, an included driver, and dimming options such as 0–10V, Casambi, and DALI, the Bunny Track 600 combines high visual comfort, minimalist design, and long-lasting reliability, backed by a 5-year warranty.

LIGHTING:

LED

VOLTAGE:

110-277V

GASKETS:

Silicone gaskets

FIXTURE TYPE:

Inground Luminaires

MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation, Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved

Updated 02/18/2026

BULLARD
BOLLARDS
Think Bollard Think Bullard

CODE:
BB-001296.NGST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:







APPLINCE CLASS:

III

OPERATION RANGE:

110-277V - 50/60 Hz

DRIVER POSITION:

Included

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Nylon cable gland M20 Ø 7/13 mm / H07RN8-F 3x1mm2

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

12° - Symmetrical narrow beam (<=15°)
25° - Symmetrical medium flood (15 ° - 45 °)
50° - Symmetrical wide beam (45 ° - 125 °)
14° x 47° - 2 Axis symmetrical
78° x 47° - Asymmetric flood (wall washer)

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes
Functional design
Minimal design / Shock resistant
Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Stainless steel

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved


Updated 02/18/2026

BULLARD
BOLLARDS
Think Bollard Think Bullard

CODE:
BB-001296.NGST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

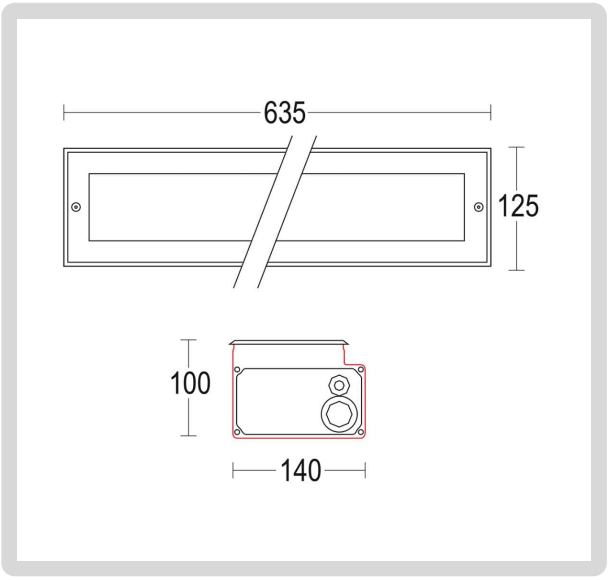

HOW TO ORDER: | **CODE:**

Example:
CODE: BB-001296.NGST-GH-B2-L2-DIM -AC204-5P

BB-001296.NGST-GH-B2-L2-DIM -AC204-5P

1 MODELS:

A) Recessed depth -	P:	3.94" (10 cm)
B) Length -	L:	25.00" (63.5 cm)
C) Width -	H:	4.92" (12.5 cm)
D) Cutout length -	CL:	26.65" (67.7 cm)
E) Cutout width -	CW:	5.51" (14 cm)

2 BEAM ANGLE:

-B1	12°
-B2	25°
-B3	50°
-B4	14° x 47°
-B5	78° x 47°

3 LIGHT SOURCE:

-L1	LED / 1 x 18W / 3000K / 1 x 1752 lm / 110-277V
-L2	LED / 1 x 25.2W / 3000K / 1 x 2352 lm / 110-277V
-L3	LED / 1 x 32W / 3000K / 1 x 3024 lm / 110-277V
-L4	LED / 1 x 18W / 4000K / 1 x 1944 lm / 110-277V
-L5	LED / 1 x 25.2W / 4000K / 1 x 2616 lm / 110-277V
-L6	LED / 1 x 32W / 4000K / 1 x 3364 lm / 110-277V

4 DIMMING OPTIONS:

-NON	NON-Dimmable
-DIM	0-10V
-CAS	Casambi
-DAL	Dali

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved


Updated 02/18/2026

BULLARD BOLLARDS
Think Bollard Think Bullard

CODE: BB-001296.NGST-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

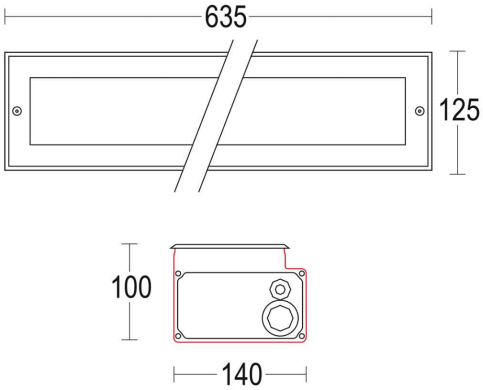

LED IP67 STANDARD 110-277V CASAMBI III DALI

HOW TO ORDER:	CODE:
Example: CODE: BB-001296.NGST-GH-B2-L2-DIM -AC204-5P	BB-001296.NGST-GH-B2-L2-DIM -AC204-5P

5 ACCESSORIES:

-AC204
IP 68 fast connector 4P



-AC204-5P
IP 68 fast connector 5P



-AC279
IP 68 connector for through wiring 4P



-AC279-5P
IP 68 connector for through wiring 5P



-AC281
Rough-in housing 635x140x100



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved

Updated 02/18/2026