BYIBA
LIGHT



MINILED ALU (DOWN LIGHT COLLECTION/ CEILING RECESSED)

The MINILED ALU 4253C is a surface-mounted ceiling luminaire handmade in Italy from ALUMITE®. Its slender Ø0.79″ (2.0 cm) body houses an integrated 6W LED with CRI 90. Available in White or Black, with 2700K, 3000K or 4000K light and 20°, 30°, 40° or 50° optics. A remote constant-current driver is required and is not included.





ALUMITE® / Integrated LED

BYIBA LIGHT

CODE:
BY-4253C-9010

PRODUCT OVERVIEW

A compact surface-mounted ceiling light with interchangeable optics and an exposed lead. Handmade in Italy in White or Black ALUMITE®.

INSTALLATION

Surface ceiling mounting.
Diameter: Ø0.79″ (2.0 cm).
Lower cylinder: 2.91″ (7.4 cm).
Mount section: 0.59″ (1.5 cm).
Lead: MAX 19.69″ (50.0 cm).

Requires a suitable remote LED driver. Dimmable only with a suitable dimmable driver.

PROJECT

SPEC TYPE

NOTES



INCLUDED

Luminaire with integrated LED and selected beam optic.

NOT INCLUDED

Remote driver and optional accessories.

MATERIAL
ALUMITE®

LIGHTING
Integrated LED

FINISHING
White / Black

EFFICIENCY
80%

SUPPLY
Constant current / max 500mA

DRIVER POSITION
Remote; driver not included

PROTECTION / COMPLIANCE
IP20 / Class III

WEIGHT
0.10 kg



ETL LISTED C US

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM


OUTDOOR | TECHNICAL | DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026

BYIBA
LIGHT

CODE:
BY-4253C-9010

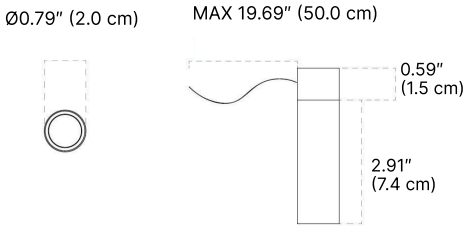

HOW TO ORDER:

Example:
CODE: BY-4253C-9010-L1-K30-B20-DIM-028.216-WH

1 DIMENSIONS:

Diameter: Ø0.79" (2.0 cm) / Cylinder: 2.91" (7.4 cm)
Mount: 0.59" (1.5 cm) / Lead: MAX 19.69" (50.0 cm)

2 LIGHT SOURCE:

-L1	LED / 4W / 110-277V / CRI 90 / 350mA / 480lm
-L2	LED / 6W / 110-277V / CRI 90 / 500mA / 660lm

3 CCT&LUMENS:

-K27	2700K = 630lm
-K30	3000K = 660lm
-K40	4000K = 690lm

4 BEAM ANGLE:

-B20	20°
-B30	30°
-B40	40°
-B50	50°

5 DIMMING INTERFACE:

-PD	Phace Dimming (Triac/ELV)
-DIM	0-10V
-DALI	DALI
-NON	Non-Dimmable

6 ACCESSORIES:

-028.216	Honeycomb anti-glare diffuser Ø0.63" (1.6 cm)
-099.804.P	Additional 40° lens and spring
-099.802.P	Additional 20° lens and spring
-099.805.P	Additional 50° lens and spring
-099.803.P	Additional 30° lens and spring

7 FINISH OPTIONS:

-WH	White
-BL	Black

PROJECT

SPEC TYPE

NOTES

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR | TECHNICAL | DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026