
BYIBA
LIGHT



MICROLED ROUND (DOWN LIGHT COLLECTION/ CEILING RECESSED)

The MICROLED ROUND 4248G is a ceiling recessed luminaire handmade in Italy from paintable white CRISTALY®. Its integrated 5W LED illuminates through a discreet Ø0.43″ (1.1 cm) aperture. Available in 2700K, 3000K and 4000K, it offers a light source flux of 320–370 lm with CRI 90. The ON/OFF driver is built in and included.



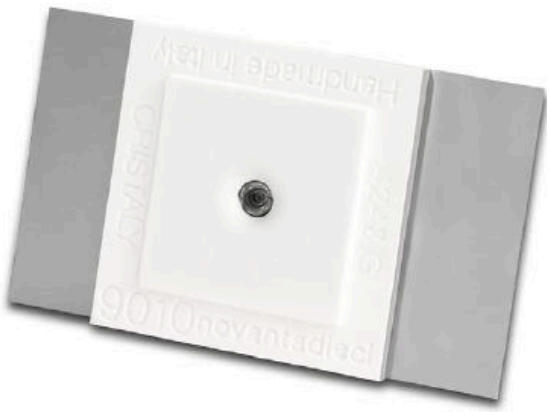

CRISTALY® / Integrated LED

BYIBA LIGHT

CODE:
BY-4248G-9010

PRODUCT OVERVIEW


A compact ceiling recessed light with a Ø0.43″ (1.1 cm) aperture. The white, paintable CRISTALY® body integrates discreetly into the ceiling. Handmade in Italy with an integrated 5W LED.

Built-in ON/OFF driver included inside the fixture. Available in three color temperatures.

PROJECT

SPEC TYPE

NOTES



INSTALLATION

Ceiling recessed.
Cutout: 3.74″ × 3.74″ (9.5 × 9.5 cm).

INCLUDED

Fixture with integrated LED and built-in ON/OFF driver.

SOURCE DATA

Flux values refer to the light source, not delivered lumens. Input mains voltage is not provided.

MATERIAL:
CRISTALY®

LIGHTING:
Integrated LED

FINISHING:
White (Paintable)

CCT:
2700K / 3000K / 4000K

POWER / CRI:
5W / CRI 90

LIGHT SOURCE FLUX:
320 / 350 / 370 lm by CCT

EFFICIENCY:
86%

SUPPLY / INPUT:
Constant current, MAX 1400mA

DRIVER / CONTROL:
Built-in, included / ON/OFF

IP RATING:
IP20/IP44

INSULATION CLASS:
III

WEIGHT:
0.2 kg

LED | 110-277V | IP20 | IP44 | STANDARD

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM


OUTDOOR | TECHNICAL | DECORATIVE


Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026

BYIBA
LIGHT

CODE:
BY-4248G-9010

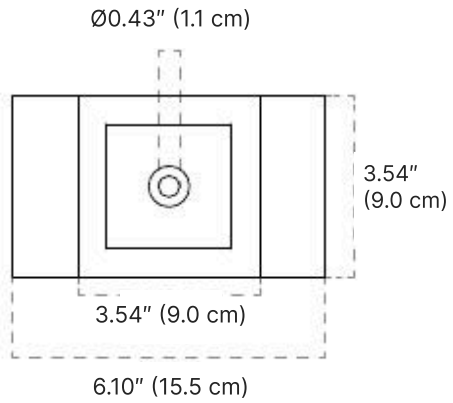

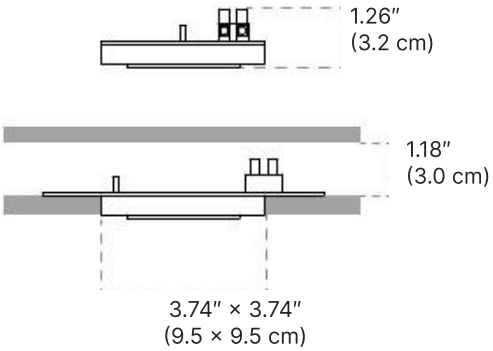

HOW TO ORDER:

Example:
CODE: BY-4248G-9010-K30-DIM-028.211

1 DIMENSIONS:

Flange span: 6.10″ (15.5 cm) / Body: 3.54″ × 3.54″ (9.0 × 9.0 cm)
Light aperture: Ø0.43″ (1.1 cm) / Overall height: 1.26″ (3.2 cm)
Installation detail: 1.18″ (3.0 cm) / Cutout: 3.74″ × 3.74″ (9.5 × 9.5 cm)

2 LIGHT SOURCE:

LED / 5W / 110-277V / CRI 90

3 CCT&LUMENS:

-K27	2700K = 320lm	
-K30	3000K = 350lm	
-K40	4000K = 370lm	

4 DIMMING INTERFACE:

-PD	Phace Dimming (Triac/ELV)
-DIM	0-10V
-DALI	DALI
-NON	Non-Dimmable

5 ACCESSORIES:

-028.211	Honeycomb Anti-Glare Diffuser Ø1.1cm
-099.807.P	Additional lens 40°
-099.806.P	Additional lens 20°

PROJECT

SPEC TYPE

NOTES

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR | TECHNICAL | DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026