BYİBA
LIGHT

NEON
LINEAR MODULES
(magnetic track system)



BYIBA
LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES



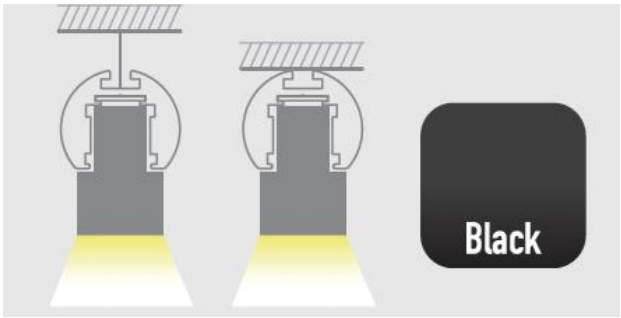

LED | 110-277V | IP20 | LUTRON | CASAMBI

GENERAL INFORMATION:

Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser, prismatic, in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings. The track system is operated with 48VDC, 1.18" (30 mm) diameter, small and exquisite.

MATERIAL:

Metal

FINISHING:

Black

LIGHTING:

LED

INPUT VOLTAGE:

48VDC

IP RATING:

20

MAXIMUM LOAD:

350W

PROFILES FINISH OPTION:

Black

MODULES FINISH OPTION:

Black

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved

Updated 03/02/2025


BYIBA
LIGHT

BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES

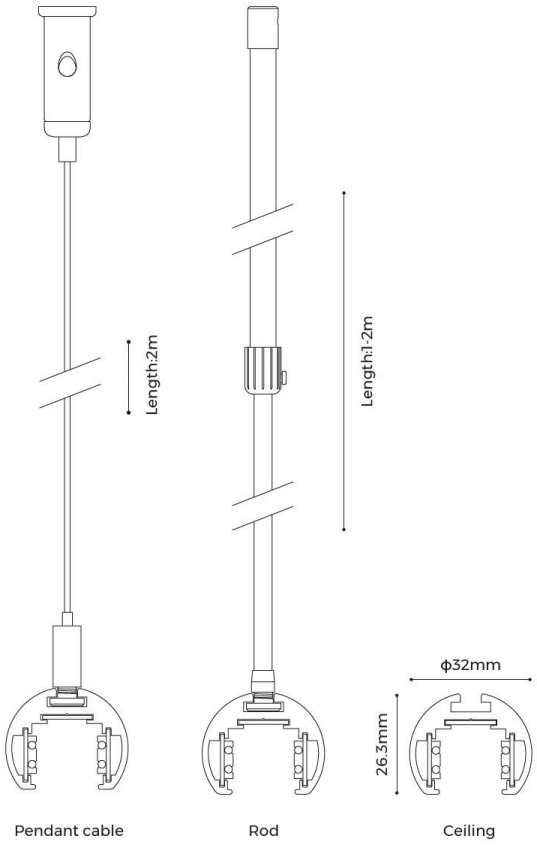

LED | 110-277V | IP20

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

BY-NNLM-MTS-SC-01-100P

1 INSTALLATION TYPE:

-SC	Suspension with pendant cable
-SR	Suspension with rod
-SM	Surface-Mounted

2 DIMENSIONS:

-01	A) Diameter -	Ø: 1.20" (3 cm)
	B) Length -	H: 39.4" (100 cm)
-02	A) Diameter -	Ø: 1.20" (3 cm)
	B) Length	H: 78.7" (200 cm)
-03	A) Diameter -	Ø: 1.20" (3 cm)
	B) Length	H: 118" (300 cm)

3 POWER SUPPLY:

-100P	100W
-150P	150W
-250P	250W

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved


Updated 03/02/2025

BYIBA
LIGHT

BY-NNLM-MTS

CODE:

LINEAR MODULES

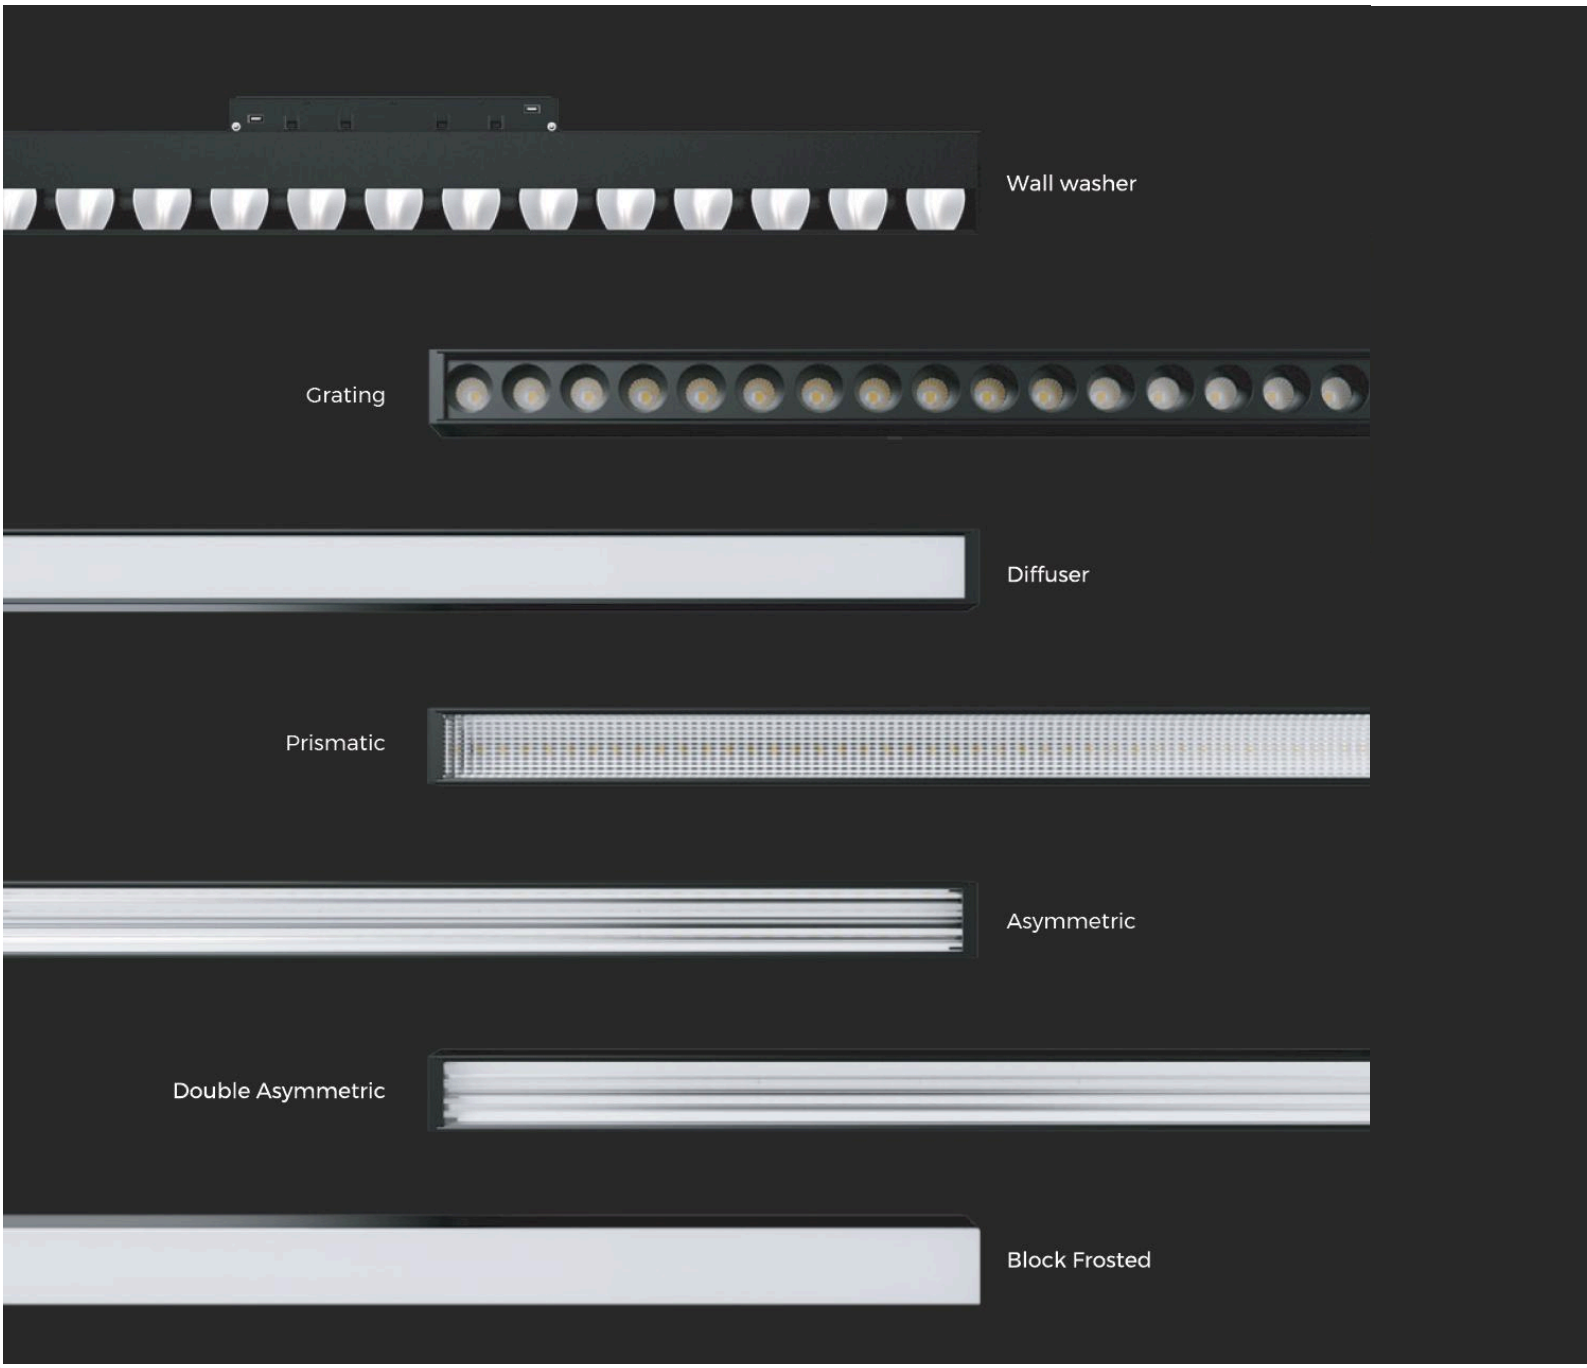

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025


BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES

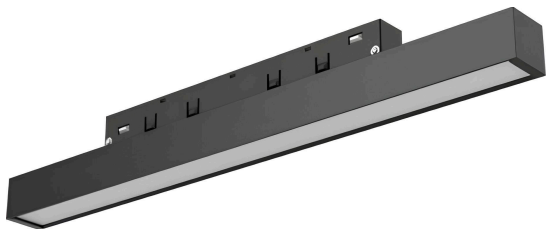

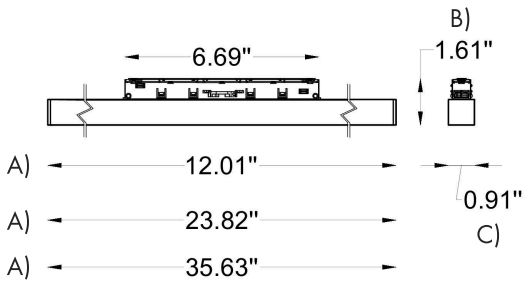

LED | 48 VDC | IP20 | LUTRON | CASAMBI

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -M20FD

Dimensions:	A) Length -	-L1 L: 12" (30.5 cm)	☐
		-L2 L: 23.82" (60.5 cm)	☐
		-L3 L: 35,63" (90.5 cm)	☐
	B) Height -	H: 1.61" (4.1 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:	Diffuser		
Light Source:	-LS1	LED / 7W / 490 lm	☐
	-LS2	LED / 14W / 980 lm	☐
	-LS3	LED / 20W / 1400 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	100°		
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Coating:	Black
IP rating:	IP20
Color tolerance:	SDCM< 3 step
Intallation:	Track mounted
Warranty:	3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved

Updated 03/02/2025


BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES

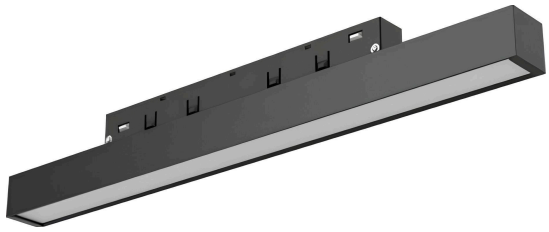

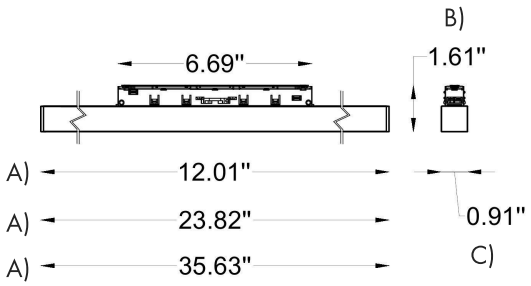

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-M20FP		
Dimensions:	A) Length -	-L1 L: 12" (30.5 cm)	☐
		-L2 L: 23.82" (60.5 cm)	☐
		-L3 L: 35,63" (90.5 cm)	☐
	B) Height -	H: 1.61" (4.1 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:	Prismatic		
Light Source:	-LS1	LED / 7W / 525 lm	☐
	-LS2	LED / 14W / 1050 lm	☐
	-LS3	LED / 20W / 1500 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	65°x90°		
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐
Coating:	Black		
IP rating:	IP20		
Color tolerance:	SDCM< 3 step		
Intallation:	Track mounted		
Warranty:	3 years		

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

LED | 48 VDC | IP20 | LUTRON | CASAMBI

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025

BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES



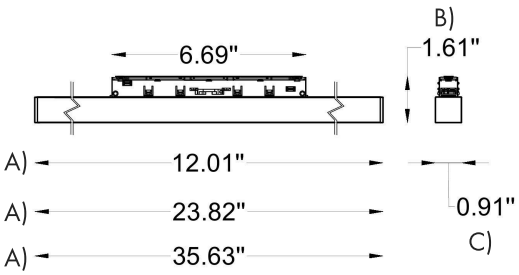

LED | 48 VDC | IP20 | LUTRON | CASAMBI

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -M20LA

Dimensions:	A) Length -	-L1 L: 12" (30.5 cm)	☐
		-L2 L: 23.82" (60.5 cm)	☐
		-L3 L: 35,63" (90.5 cm)	☐
	B) Height -	H: 1.61" (4.1 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:	Lens (Asymmetric)		
Light Source:	-LS1	LED / 7W / 700 lm	☐
	-LS2	LED / 14W / 1400 lm	☐
	-LS3	LED / 20W / 2000 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	90° x45° x15°		
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Coating:	Black
IP rating:	IP20
Color tolerance:	SDCM< 3 step
Intallation:	Track mounted
Warranty:	3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025

BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES



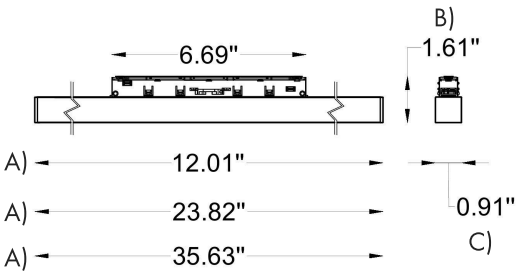

LED | 48 VDC | IP20 | LUTRON | CASAMBI

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -M20LS

Dimensions:	A) Length -	-L1 L: 12" (30.5 cm)	☐
		-L2 L: 23.82" (60.5 cm)	☐
		-L3 L: 35,63" (90.5 cm)	☐
	B) Height -	H: 1.61" (4.1 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:		Lens (Double asymmetric)	
Light Source:		-LS1 LED / 7W / 700 lm	☐
		-LS2 LED / 14W / 1400 lm	☐
		-LS3 LED / 20W / 2000 lm	☐
CCT:		-K27 2700K	☐
		-K30 3000K	☐
		-K40 4000K	☐
CRI:		>90	
Beam Angle:		100° x90° x15°	
Input voltage:		48VDC	
Dimming:		-NON Non-Dimmable	☐
		-DL Dali	☐
		-LU Lutron	☐
		-CA Casambi	☐

Coating:	Black
IP rating:	IP20
Color tolerance:	SDCM< 3 step
Intallation:	Track mounted
Warranty:	3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

ETL LISTED c US

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025


BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES

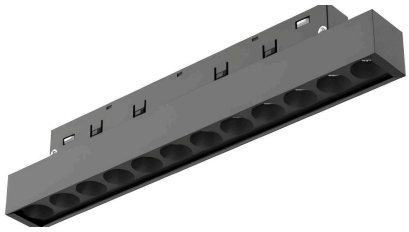

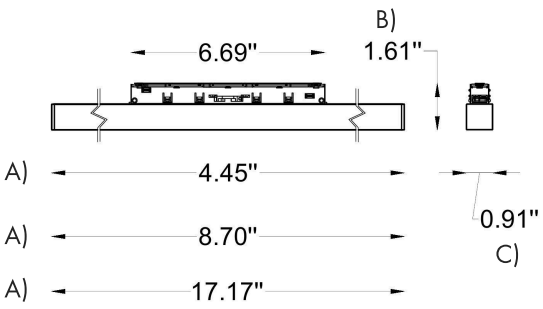

LED | 48 VDC | IP20 | LUTRON | CASAMBI

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-M20G		
Dimensions:	A) Length -	-L1 L: 4.45" (11.3 cm)	☐
		-L2 L: 8.7" (22.1 cm)	☐
		-L3 L: 17,17" (43.61 cm)	☐
	B) Height -	H: 1.61" (4.1 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:	Grating		
Light Source:	-LS1	LED / 6W / 470 lm	☐
	-LS2	LED / 12W / 940 lm	☐
	-LS3	LED / 24W / 1800 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	-B1	30°	☐
	-B2	55°	☐
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐
Coating:	Black		
IP rating:	IP20		
Color tolerance:	SDCM< 3 step		
Intallation:	Track mounted		
Warranty:	3 years		

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved

Updated 03/02/2025


BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES

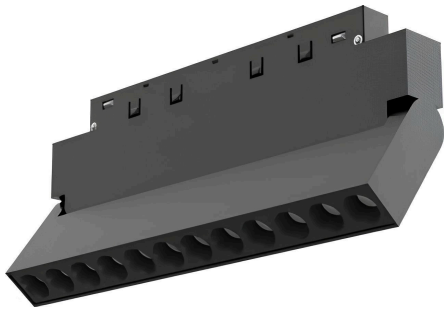

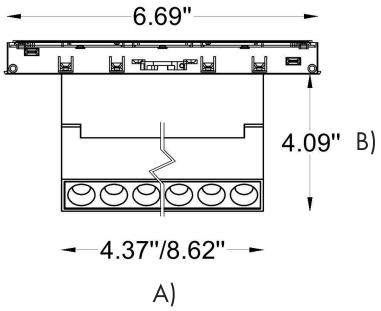

LED | 48 VDC | IP20 | LUTRON | CASAMBI

90°

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-M20G-A		
Dimensions:	A) Length -	-L1 L: 4.37" (11.1 cm)	☐
		-L2 L: 8.62" (21.92 cm)	☐
	B) Height -	H: 4.1" (10.4 cm)	
Diffuser:	Grating		
Light Source:	-LS1	LED / 6W / 420 lm	☐
	-LS2	LED / 12W / 940 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	-B1	30°	☐
	-B2	40°	☐
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐
Coating:	Black		
IP rating:	IP20		
Color tolerance:	SDCM< 3 step		
Intallation:	Track mounted		
Warranty:	3 years		

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved

Updated 03/02/2025

BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES



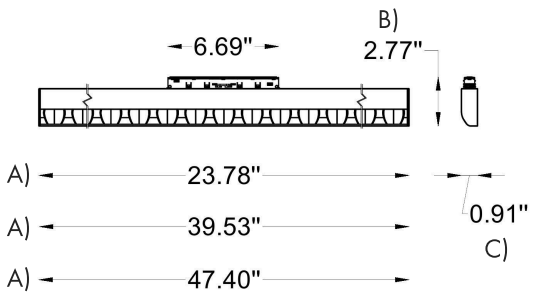

LED | 48 VDC | IP20 | LUTRON | CASAMBI

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-M20GW		
Dimensions:	A) Length -	-L1 L: 23.78" (60 cm)	☐
		-L2 L: 39.53" (100 cm)	☐
		-L3 L: 47,40" (120 cm)	☐
	B) Height -	H: 2.77" (7.3 cm)	
	C) Width -	W: 0.91" (2.31 cm)	
Diffuser:	Lens		
Light Source:	-LS1	LED / 10W / 900 lm	☐
	-LS2	LED / 15W / 1350 lm	☐
	-LS3	LED / 20W / 1800 lm	☐
CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
CRI:	>90		
Beam Angle:	-B1	60°	☐
	-B2	75°	☐
Input voltage:	48VDC		
Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐
Coating:	Black		
IP rating:	IP20		
Color tolerance:	SDCM< 3 step		
Intallation:	Track mounted		
Warranty:	3 years		

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

ETL LISTED C US

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025

BYIBA LIGHT


BY-NNLM-MTS

PROJECT

SPEC TYPE

NOTES



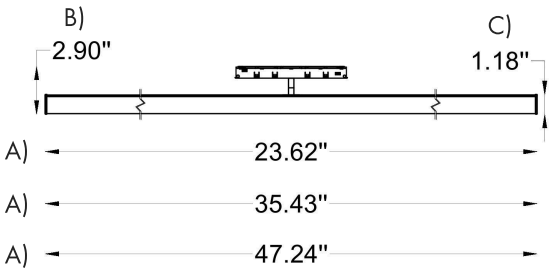

HOW TO ORDER:

CODE:

Example:
CODE FOR TRACK: BY-NNLM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20FD-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20FD-L1-LS1-K27-NON

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -M20CD

Dimensions:	A) Length -	-L1 L: 23.62" (60 cm)	☐
		-L2 L: 35.43" (100 cm)	☐
		-L3 L: 47,24" (120 cm)	☐
	B) Height -	H: 2.9" (7.4 cm)	
	C) Diameter -	Ø: 1.81" (3 cm)	
Diffuser:		PC	
Light Source:		-LS1 LED / 12W / 1200 lm	☐
		-LS2 LED / 18W / 1800 lm	☐
		-LS3 LED / 24W / 2400 lm	☐
CCT:		-K27 2700K	☐
		-K30 3000K	☐
		-K40 4000K	☐
CRI:		>90	
Beam Angle:		-B1 150°	☐
Input voltage:		48VDC	
Dimming:		-NON Non-Dimmable	☐
		-DL Dali	☐
		-LU Lutron	☐
		-CA Casambi	☐
Coating:		Black	
IP rating:		IP20	
Color tolerance:		SDCM< 3 step	
Intallation:		Track mounted	
Warranty:		3 years	

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

LED | 48 VDC | IP20 | LUTRON | CASAMBI

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved

Updated 03/02/2025

BYIBA
LIGHT

BY-NNLM-MTS

ACCESSORIES:

-L90-MR20(A)
L-shaped corner
(Downward)



-L90N-MR20(A)
L-shaped corner
(Inward)



-L90-MR20(B)
L-shaped corner
(Downward)



-L90N-MR20(B)
L-shaped corner
(Inward)



-L90-MR20(C)
L-shaped corner
(Downward)



-L90N-MR20(C)
L-shaped corner
(Inward)



-L90-MS20
L-shaped corner
(Downward)



-L90N-MS20
L-shaped corner
(Inward)



-L90-MH20
L-shaped corner
(Downward)



-L90N-MH20
L-shaped corner
(Inward)



-L90-MH20(A)
L-shaped Adjustable
corner
(Downward)



-T90-MH20(A)
T-shaped Adjustable
corner
(Downward)



-X90-MH20(A)
X-shaped Adjustable
corner
(Downward)



HOW TO ORDER:

Example:
CODE: -L90MR20(A)-X90-MH20(A)

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2026 All Rights Reserved
Updated 04/04/2026

BYIBA LIGHT

BY-NNLM-MTS

ACCESSORIES:

-PN-D
Pendant cable (Track)



-TLS-R892
Pendant cable (Neon)



-PG-I
Pendant rod (Track)



-TLS-R893
Pendant rod (Neon)



-CL-18
Ceiling accessories (Neon)



-CL-21
Ceiling screw (Track)



-TLS-R862(N)
Power feeder of track



-TLS-R865
Female end cap



-TLS-R600
End cap



-TLS-R860
Turned connector



-TLS-R861
Straight connector (Without Wire locker)



-TLS-R863(N)
I-shaped electrical connector
180°splicing bar



HOW TO ORDER:

Example:
CODE: PN-D-TLS-R893-CL21-TLS-R861

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025

BYIBA
LIGHT

BY-NNLM-MTS

POWER SUPPLY:

-PN-D	-BN-V48-150P	-BN-V48-250P
100W Power supply	150W Power supply	250 Power supply
☐	☐	☐
		

HOW TO ORDER:

Example:
CODE: PN-D

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
©2024 All Rights Reserved
Updated 03/02/2025