BYIBA
LIGHT



MICROLED LINE (DOWN LIGHT COLLECTION/ CEILING RECESSED)

The 4253D MICROLED LINE is a ceiling recessed LED spotlight handmade in Italy from paintable CRISTALY®. Its projecting tubular light head brings light below the mounting surface. Available in 2700K, 3000K and 4000K, the integrated 5W LED offers source flux of 230–250 lm with CRI 90. ON/ OFF Driver included inside.





CRISTALY® / Integrated LED

BYIBA
LIGHT

CODE:
BY-4253D-9010

PRODUCT OVERVIEW

Ceiling recessed LED spotlight with a projecting tubular light head. Handmade in Italy in paintable CRISTALY®.

Aiming is illustrated in the product photograph. Numerical tilt and rotation ranges are not specified.

PROJECT

SPEC TYPE

NOTES



INSTALLATION

Ceiling recessed.
Cutout: 3.74" × 3.74"
(9.5 × 9.5 cm).
Cavity depth: 1.18" (3.0 cm).

INCLUDED

Fixture with integrated LED.
ON/OFF Driver included inside.



MATERIAL:
CRISTALY®

LIGHTING:
Integrated LED

FINISHING:
CRISTALY® Paintable

CCT:
2700K / 3000K / 4000K

POWER / CRI:
5W / CRI 90

LIGHT-SOURCE FLUX:
230 / 240 / 250 lm

EFFICIENCY:
86%

SUPPLY:
Constant current, MAX 900mA

CONTROL / DRIVER:
ON/OFF; built-in driver included

IP / INSULATION CLASS:
IP20 / III

WEIGHT:
0.3 kg

CERTIFICATION:
CE



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM


OUTDOOR | TECHNICAL | DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026

BYIBA
LIGHT

CODE:
BY-4253D-9010

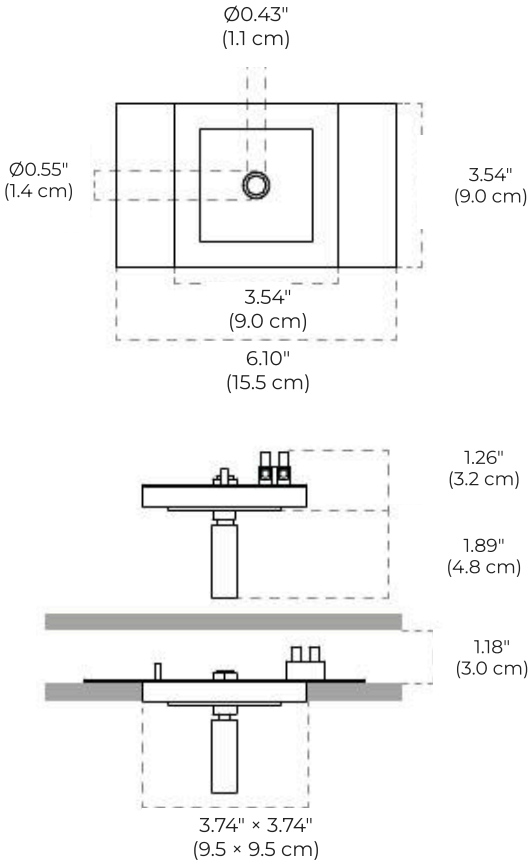

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:
CODE: BY-4253D-9010-K30-DIM-028.211

1 DIMENSIONS:

Flange span: 6.10″ (15.5 cm)
Body: 3.54″ × 3.54″ (9.0 × 9.0 cm)
Inner diameter: Ø0.43″ (1.1 cm); outer: Ø0.55″ (1.4 cm)
Upper side-view extent: 1.26″ (3.2 cm)
Light-head projection: 1.89″ (4.8 cm)
Cavity depth: 1.18″ (3.0 cm)

2 LIGHT SOURCE:

LED / 5W / 110-277V / CRI 90

3 CCT&LUMENS:

-K27	2700K = 230lm	
-K30	3000K = 240lm	
-K40	4000K = 250lm	

4 BEAM ANGLE:

-B20	20°
-B40	40°

5 DIMMING INTERFACE:

-PD	Phace Dimming (Triac/ELV)
-DIM	0-10V
-DALI	DALI
-NON	Non-Dimmable

6 ACCESSORIES:

-028.211	Honeycomb Anti-Glare Diffuser Ø1.1cm
-099.807.P	Additional lens 40°
-099.806.P	Additional lens 20°

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR | TECHNICAL | DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

Updated 10/21/2026